VX3X User's Guide

LXE

Copyright © November 2006 by LXE Inc.
All Rights Reserved
E-EQ-VX3XOGWW-A

Java Powered

Microsoft Windows Embedded

LANGUAGE: ENGLISH

Notices

Notice:

LXE Inc. reserves the right to make improvements or changes in the products described in this manual at any time without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, LXE assumes no liability resulting from any errors or omissions in this document, or from the use of the information contained herein. Further, LXE Incorporated, reserves the right to revise this publication and to make changes to it from time to time without any obligation to notify any person or organization of such revision or changes.

Copyright Notice:

This manual is copyrighted. All rights are reserved. This document may not, in whole or in part, be copied, photocopied, reproduced, translated or reduced to any electronic medium or machine-readable form without prior consent, in writing, from LXE Inc.

Copyright © 2006 by LXE Inc. An EMS Technologies Company.
125 Technology Parkway, Norcross, GA 30092 U.S.A. (770) 447-4224

Trademarks:

LXE® is a registered trademark of LXE Inc. **RFTerm**® is a registered trademark of EMS Technologies, Norcross, GA.

Microsoft, Windows and the Windows logo are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Java® and Java-based trademarks and logos are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. or other countries, and are used under license.

Intel and Intel XScale are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

RAM® and RAM Mount™ are both trademarks of National Products Inc., 1205 S. Orr Street, Seattle, WA 98108.

Summit Data Communications, Inc. Summit Data Communications, the Summit logo, and "The Pinnacle of Performance" are trademarks of Summit Data Communications, Inc. All rights reserved.

The **Bluetooth**® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by LXE, Inc. is under license.

Wavelink®, the Wavelink logo and tagline, Wavelink Studio™, Avalanche Management Console™, Mobile Manager™, and Mobile Manager Enterprise™ are trademarks of Wavelink Corporation, Kirkland, WA.

All other brand or product names are trademarks or registered trademarks of their respective companies or organizations.

When this manual is in PDF format: "**Acrobat**® Reader® Copyright © 2006 Adobe Systems Incorporated. All rights reserved. Adobe®, the Adobe logo, Acrobat®, and the Acrobat logo are registered trademarks of Adobe Systems Incorporated." applies.

The user is strongly cautioned to read Appendix B, "Regulatory Notices and Safety Information". Important safety cautions, warnings and regulatory information is contained in Appendix B.

Important: This symbol is placed on the product to remind users to dispose of Waste Electrical and Electronic Equipment (WEEE) appropriately, per Directive 2002-96-EC. In most areas, this product can be recycled, reclaimed and re-used when properly discarded. Do not discard labeled units with trash. For information about proper disposal, contact LXE through your local sales representative, or visit www.lxe.com.

Table of Contents

THE VX3X VEHICLE MOUNT COMPUTER 1

Introduction 1
Document Conventions 2
Environmental Specifications 2
Quick Start 3
Components 4
Microsoft Windows CE .NET Control Panel 6
The Half-Screen Display 6
AppLock and the VX3X 7
Single Application AppLock 7
Multi-Application AppLock 7
Touch 7
Hotkey 7
The QWERTY Keyboard 8
IBM 3270 Overlay 8
IBM 5250 Overlay 8
Key Functions 9
CAPS Key and CapsLock Mode 10
Keypad Shortcuts 10
Keypress Sequences 10
Custom Key Maps 10
LED Functions 11
General Windows CE .NET Keyboard Shortcuts 12
Input Panel (Virtual Keyboard) 13
Enabling the Input Panel 13
Power Supply 14
Backup Battery 14
Getting Help 15
Manuals and Accessories 15
Manuals 15
Accessories 15

INSTALLATION 19

Install Mounting Brackets 19
RAM Mount System 20

Components 20
Torque Measurements 20
Procedure 21
Step 1 – Mount Vehicle RAM Clamp Mount 21
Mounting Dimensions 22
Step 2 – Attach RAM Mount Ball to the VX3X 23
Step 3 – Attach VX3X Assembly to RAM Mount 24
Completed Assembly 24
Install Stylus Tether and Sleeve (Optional) 25
Install/Remove Touchscreen Protective Film Optional) 25
Connect Serial Barcode Scanner 26
Connect Serial Printer or PC 28
USB-C Port 29
Connect External Headset 30
LXE Headsets 30
Other Headsets 31
Connect Power Cable 32
External Power Supply, Optional 33
Vehicle 12-80VDC Power Connection 34

OPERATION 37

Power Button 37
Power Management 37
Restart Sequence 37
Display and Touchscreen 38
Set the Display Contrast 38
Set the Display Backlight Timer 38
Set the Display Brightness 38
Cleaning the Display 39
Disabling the Touchscreen 39
Calibrating the Touchscreen 39
Touchscreen Protective Film 39
Adjust Speaker Volume 40
Using the Keypad 40
Using the Touchscreen 40
Microsoft Windows CE .NET Event Sounds 40
Laser Barcode Scanner Warnings 41
Enter Data 41
Keyboard Entry 42

Touchscreen Entry 42
Right Click 42
Scanner Entry 43
Aiming the Barcode Scanner 43
Distance from Label 43
Successful Scan 43
Unsuccessful Scan 43

APPENDIX A KEY MAPS 45

The VX3X Keypad 45
Key Map 101-Key Equivalencies 45
IBM 3270 Keypad Overlay 50
IBM 5250 Keypad Overlay 50

APPENDIX B REGULATORY NOTICES AND SAFETY INFORMATION 51

Approvals 52

INDEX 59

Illustrations

Figure 1 VX3X Components, Top View 4
Figure 2 VX3X Components, Front View 4
Figure 3 VX3X Components, Back View 5
Figure 4 End-User Multi-Application Touch Panel 7
Figure 5 QWERTY Keyboard Standard Overlay 8
Figure 6 QWERTY Keyboard with IBM 3270 Overlay 8
Figure 7 QWERTY Keyboard with IBM 5250 Overlay 8
Figure 8 LED Functions 11
Figure 9 Small and Large Virtual Keyboards 13
Figure 10 RAM Clamp Mount Components 21
Figure 11 Assembled RAM Clamp Mount 21
Figure 12 RAM Clamp Mount - Mounting Dimensions (Not To Scale) 22
Figure 13 Attach RAM Mount to VX3X 23
Figure 14 RAM Assembly 24
Figure 15 Completed RAM Mount Assembly 24
Figure 16 Connect Serial Scanner Cable 26
Figure 17 VX3X with Generic Barcode Scanner Attached 27
Figure 18 Generic Barcode Scanner 27
Figure 19 Connect Serial Cable to COM3 28
Figure 20 Connect USB-C Cable 29
Figure 21 Connect External Headset 30
Figure 22 Headset Adapter Cable Components 30
Figure 23 Headset Quick Disconnect Connector 31
Figure 24 Connect Power Cable to VX3X 32
Figure 25 Optional Power Configuration 33
Figure 26 Vehicle Power Connection Cable (Fuse Not Shown) 34
Figure 27 Connecting the Power Cable to the Vehicle 34
Figure 28 Vehicle Connection Wiring Color Codes 35
Figure 29 Location of the Power (PWR) Button 37
Figure 30 Touchscreen Calibration, Calibration Targets 39
Figure 31 Caution Labels Class II Scanner 41
Figure 32 Caution Labels Class IIIA Scanner 41
Figure 33 Scan Beam 43
Figure 34 VX3X QWERTY Keyboard 45
Figure 35 IBM 3270 Specific Keypad 50
Figure 36 IBM 5250 Specific Keypad 50

The VX3X Vehicle Mount Computer

Introduction

The VX3X Vehicle Mount Computer (VMC) is a rugged, vehicle-mounted, Microsoft® Windows® CE .NET equipped computer. The VX3X is capable of wireless data communications from a fork-lift truck or any properly configured vehicle. The unit uses a 2.4 GHz radio for wireless data communications.

The mobile device is horizontally oriented and features backlighting for the display. The touch-screen display supports graphic features and Windows icons that the Windows CE .NET operating system supports. The keys on the keypad are constructed of a phosphorescent material that can easily be seen in dimly lighted areas.

The VX3X provides the power and functionality of a desktop computer in a vehicle mounted unit, with a wide range of options:

- 400MHz Intel® PXA255 CPU
- 64 or 128MB of DRAM
- Wireless LAN radios with internal antenna
- USB Client port
- Available touch screen protective film
- Available RAM Mount™

Note: The "VX3X Reference Guide" contains VX3X technical information and advanced functions.

Document Conventions

This reference guide uses the following document conventions:

ALL CAPS	All caps are used to represent disk directories, file names, and application names.
Menu|Choice	Rather than use the phrase “choose the **Save** command from the **File** menu”, this manual uses the convention “choose **File|Save**”.
“Quotes”	Indicates the title of a book, chapter or a section within a chapter (for example, “Document Conventions”).
< >	Indicates a key on the keyboard (for example, <Enter>).
	Indicates a reference to other documentation.
	Differences in operation or commands due to radio type.
ATTENTION	Keyword that indicates vital or pivotal information to follow.
	Attention symbol that indicates vital or pivotal information to follow. Also, when marked on product, means to refer to the manual or operator’s guide.
	International fuse replacement symbol. When marked on the product, the label includes fuse ratings in volts (v) and amperes (a) for the product.
Note:	Keyword that indicates immediately relevant information.
Caution	Keyword that indicates a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury.
WARNING	Keyword that indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.
DANGER	Keyword that indicates an imminent hazardous situation, which, if not avoided, will result in death or serious injury.

Environmental Specifications

Operating Temperature	14°F to 122°F (-10°C to 50°C) [non-condensing]
Storage Temperature	-22°F to 158°F (-30°C to 70°C) [non-condensing]
Operating Humidity	5% to 95% non-condensing at 104°F (40°C)
Vibration	Based on MIL Std 810D
ESD	8 kV air, 4kV contact
Shock	75G, 5ms duration, 100 shock impacts

Quick Start

This section's instructions are based on the assumption that your new system is pre-configured and requires only accessory installation and a power source.

Use this guide as you would any other source book -- reading portions to learn about the VX3X, and then referring to it when you need more information about a particular subject. This guide takes you through installation and operation of the LXE VX3X.

In general, the sequence of events is:

1. Install RAM ball on back of VX3X. Install Vehicle Mounting Bracket on vehicle and secure VX3X in Mounting Bracket Assembly (see "Installation", later in this manual).
2. Connect power cable to the VX3X. If using DC power, please refer to "Vehicle 12-80VDC Power Connection", later in this manual, for instructions, warnings and fuse information.
3. Connect accessories to VX3X, e.g. scanner, etc.
4. Secure all cables to the VX3X with the Strain Relief Cable Clamps.
5. Turn the VX3X on.
6. When instructed, calibrate the touchscreen.
7. The screen may appear white while applications and drivers are loading. When complete, set Date and Time (see the "VX3X Reference Guide").
8. Configure radio (see the "VX3X Reference Guide").
9. Warmboot to ensure all registry settings are saved.
10. Device is ready for use.

The VX3X should be mounted in an area in the vehicle where it:

- Does not obstruct the vehicle driver's vision or safe vehicle operation.
- Can be easily accessed by anyone seated in the driver's seat.

	If your VX3X has AppLock installed, please contact your system administrator for setup and processing information. AppLock is configured by an administrator to limit general users to only certain programs.

Components

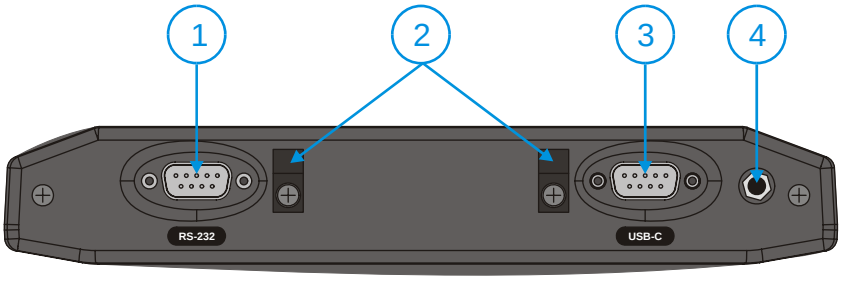

Figure 1 VX3X Components, Top View

1	COM3 / Scanner Port	3	USB Client Connector
2	Strain Relief Clamps	4	Audio Connector

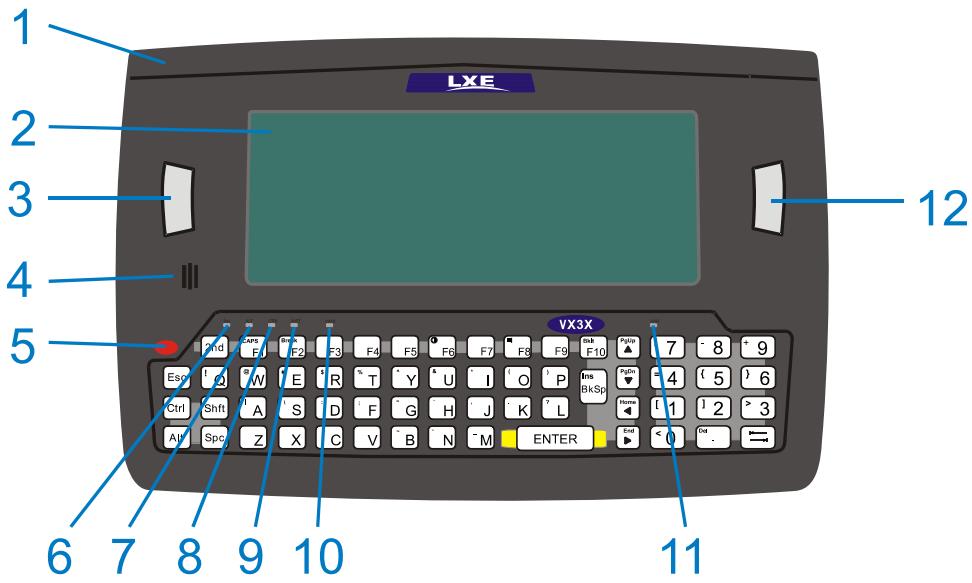

Figure 2 VX3X Components, Front View

1	Endcap	7	Alt LED
2	Display	8	Ctrl LED
3	Programmable Key	9	Shift LED
4	Beeper	10	Caps LED
5	On/Off Button	11	Status LED
6	2nd LED	12	Programmable Key

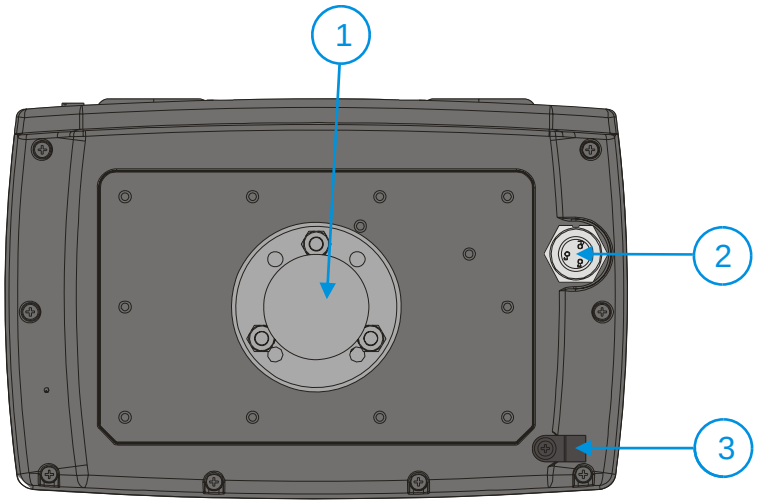

Figure 3 VX3X Components, Back View

1 RAM Ball
2 Power Connector
3 Strain Relief Clamp

Note: The RAM ball shown above is shipped unattached. The installer must assemble the RAM ball to the back of the VX3X. See "Installation" later in this manual for details.

Microsoft Windows CE .NET Control Panel

The Microsoft Windows CE .NET Control Panel provides standard Windows CE .NET options for configuring the VX3X, such as:

- Sounds and volume control
- Display configuration (including backlight power management)

Please consult your System Administrator or refer to commercially available Microsoft Windows CE .NET user guides or the on-line Help application for these standard configuration options.

The Half-Screen Display

The VX3X has a half screen transmissive LCD color display capable of supporting VGA graphics mode. The resolution is 640 x 240 pixels.

AppLock and the VX3X

AppLock may be installed and running on the mobile device. AppLock restricts access to programs and the Windows CE .NET Control Panel. Please contact your system administrator for details.

Single Application AppLock

Single application AppLock restricts a user to one application. The user is unable to exit the application (or if the application exits, it immediately restarts).

Multi-Application AppLock

The appearance of taskbar icons are different on various mobile device platforms and may differ from the example shown below. This example is shown only to aid in describing how the user can switch between applications using a stylus. If RFTerm® and Microsoft Word were the two applications locked, and the user tapped the taskbar icon to place the popup menu on screen, a switching menu showing both application icons is displayed on the screen.

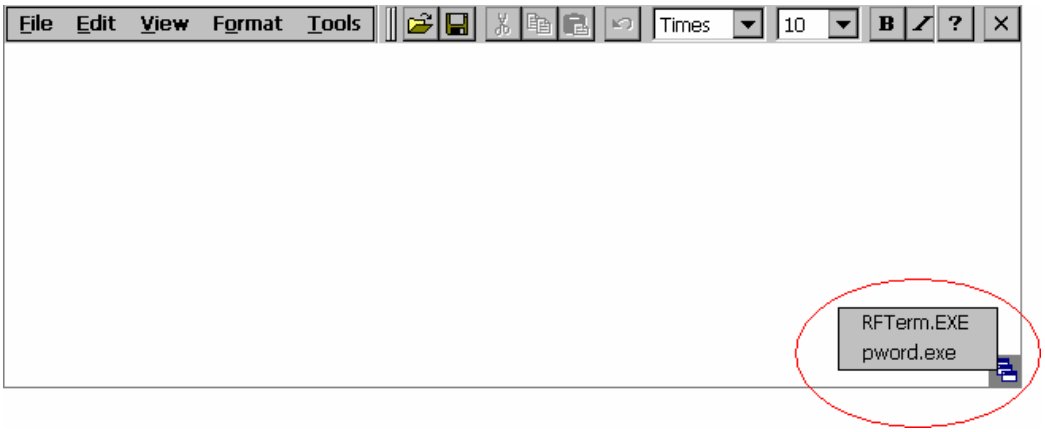

Figure 4 End-User Multi-Application Touch Panel

Touch

Tap the taskbar icon to place the popup menu on screen. Tap one of the application icons in the popup menu. The selected application is brought to the foreground while the other application continues to run in the background. Stylus taps affect the application running in the foreground only. Alternatively you can use the Tab, BackTab and/or cursor keys to move the on-screen cursor. Then press the Enter key to activate the highlighted choice.

Hotkey

If the mobile device uses LXE's Multi-Application AppLock to allow the user to switch between applications, the default Activation key is Ctrl+Spc. The key sequence switches the focus between one application and another. Data entry affects the application running in the foreground only. Note that the system administrator may have assigned a different key sequence to use when switching applications.

Note: The hotkey method can still be used if the touchscreen on the VX3X is disabled.

The QWERTY Keyboard

The VX3X has a QWERTY keyboard, available with a standard ANSI overlay, an IBM 3270 overlay or an IBM 5250 overlay. These keyboards have 101 keyboard functions, including a numeric keypad. Please refer to Appendix A, “Key Maps”, for keypress combinations.

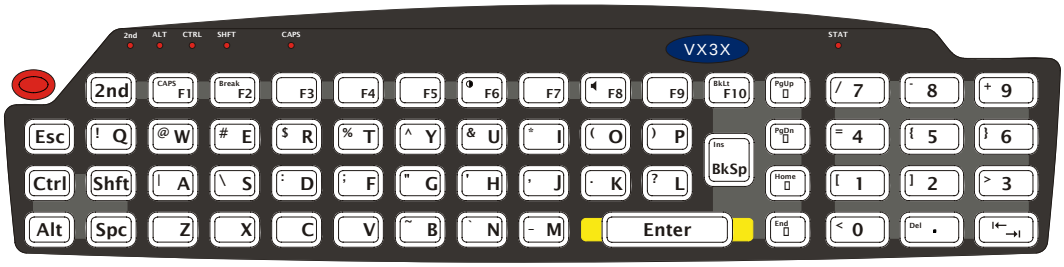

Figure 5 QWERTY Keyboard Standard Overlay

IBM 3270 Overlay

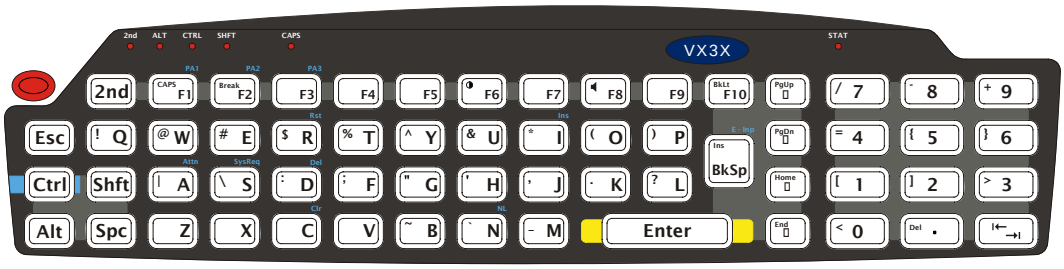

Figure 6 QWERTY Keyboard with IBM 3270 Overlay

IBM 5250 Overlay

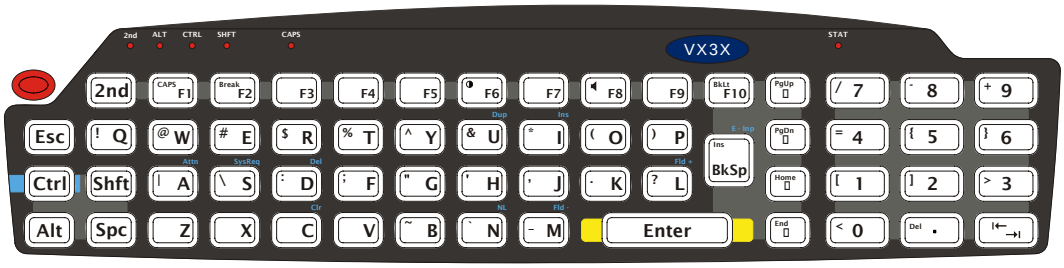

Figure 7 QWERTY Keyboard with IBM 5250 Overlay

Note: Press the <CTRL> + <Enter> keys to initiate the IBM 5250 Field Exit Function.

Key Functions

Key	Function
Programmable	For information on programming these keys, please refer to the "VX3X Reference Guide". By default, these keys function as Enter keys, except for IBM 5250 configurations where the left button is configured as "Field Exit".
Enter	The Enter key is used to confirm a form entry or to transmit information. How it is used is determined by the application running on the computer.
2nd	The 2nd key is used to activate the 2nd functions of the keypad. Printed on many keys at the upper left corner are small characters that represent the 2nd function of that key. Using the 2nd key activates the second key function. Note that the 2nd key only stays active for one keystroke. Each time you need to use the 2nd function you must press the 2nd key. To cancel a 2nd function before pressing another key, press the 2nd key again. When the 2nd function is active, the 2nd LED illuminates.
Ctrl	The Ctrl key enables the control functions of the keypad. This function is similar to a regular keyboard's Control key. Note that the Ctrl key only stays active for one keystroke. Each time you need to use a Ctrl function, you need to press the Ctrl key before pressing the desired key. When the Ctrl function is active, the Ctrl LED illuminates.
Alt	The Alt key enables the alternate functions of the keypad. This function is similar to a regular keyboard's Alt key. Note that the Alt key only stays active for one keystroke. Each time you need to use an alternate function, you need to press the Alt key before pressing the desired key. When the Alt function is active, the Alt LED illuminates.
Shft	The Shft key enables the shifted functions of the keypad. This function is similar to a regular keyboard's Shift key. Note that the Shift key only stays active for one keystroke. Each time you need to use a Shifted function, you need to press the Shft key before pressing the desired key. When the Shft function is active, the Shft LED illuminates. When the Shft key is pressed the next key is determined by the major key legends, i.e., the alpha keys display lower case letters – when CAPS is On alpha characters are capitalized. For example, when CAPS is on and the Shft key and the G key are pressed, a lower case g is displayed.
Spc	The Spc key adds a space to the line of data on the display. This function is similar to a regular keyboard's Spacebar. Note that the Spc key only stays active for one keystroke.

CAPS Key and CapsLock Mode

This function is similar to a regular keyboard's CapsLock key. Note that the CAPS mode stays active until the CAPS key sequence is pressed again. Each time you need to use a Caps function, you need to press the CAPS key sequence first. To cancel a Caps function press the CAPS key sequence again. When the Caps mode is active, the Caps LED illuminates.

The CAPS key sequence is 2nd + F1.

- No CAPS AND No Shift keypress – result is a lowercase letter.
- CAPS OR Shift – result is an uppercase letter.
- CAPS AND Shift keypress – result is a lowercase letter.

For information on preserving Caps configuration after a reboot, please see refer to the "VX3X Reference Guide".

Keypad Shortcuts

Use keyboard shortcuts instead of the stylus:

- Press Tab and an Arrow key to select a file.
- Press Shift and an Arrow key to select several files.
- Once you've selected a file, press Alt then press Enter to open its Properties dialog.
- Press 2nd then press numeric dot to delete a file.
- To force the Start menu to display, press Ctrl then press Esc.

Keypress Sequences

See Appendix A for all key press sequences.

Custom Key Maps

Custom Key Maps should not be confused with the process the system administrator uses to re-map the Programmable Key buttons on either side of the touchscreen display.

Details on Custom Key Mapping are found in the "VX3X Reference Guide".

LED Functions

Figure 8 LED Functions

Across the top of the keypad are LEDs that provide visual cues to current computer operation. When the LED is not illuminated, the function is inactive.

LED	When illuminated ...
2nd	The next keypress is a 2nd keypress. • Amber when on • Blinks amber during configuration key sequence.
ALT	The next keypress is an ALT keypress. • Amber when on and unlit when off.
CTRL	The next keypress is a CTRL keypress. • Amber when on and unlit when off.
SHFT	The next letter is the uppercase letter on alpha keys and the shifted character on the numeric keypad keys. • Amber when on and unlit when off.
CAPS	Uppercase letters are active until the CAPS key sequence is pressed again. • Amber when on and unlit when off.
STAT	Status Indicator. • Amber when device is booting up. • Blinking Green when display Suspend state begins.

General Windows CE .NET Keyboard Shortcuts

Use the keyboard shortcuts in the chart below to navigate with the VX3X keyboard. These are standard keyboard shortcuts for Windows CE .NET applications.

Press these keys …	To …
CTRL + C	Copy
CTRL + X	Cut
CTRL + V	Paste
CTRL + Z	Undo
DELETE	Delete
SHIFT with any of the arrow keys	Select more than one item in a window or on the desktop, or select text within a document.
CTRL+A	Select all.
ALT+ESC	Cycle through items in the order they were opened.
CTRL+ESC	Display the Start menu.
ALT+Underlined letter in a menu name	Display the corresponding menu.
Underlined letter in a command name on an open menu	Carry out the corresponding command.
ESC	Cancel the current task.

The touchscreen provides equivalent functionality to a mouse:

- A touch on the touchscreen is equivalent to a left mouse click.
- Many items can be moved by the “drag and drop” method, touching the desired item, moving the stylus across the screen and releasing the stylus in the desired location.
- A double stylus tap is equivalent to a double click.
- A touch and hold is equivalent to a right mouse click.

Input Panel (Virtual Keyboard)

The Input Panel may be enabled via the Input Panel icon in the Windows CE .NET Control Panel. The Input Panel can be displayed as a large or small keyboard.

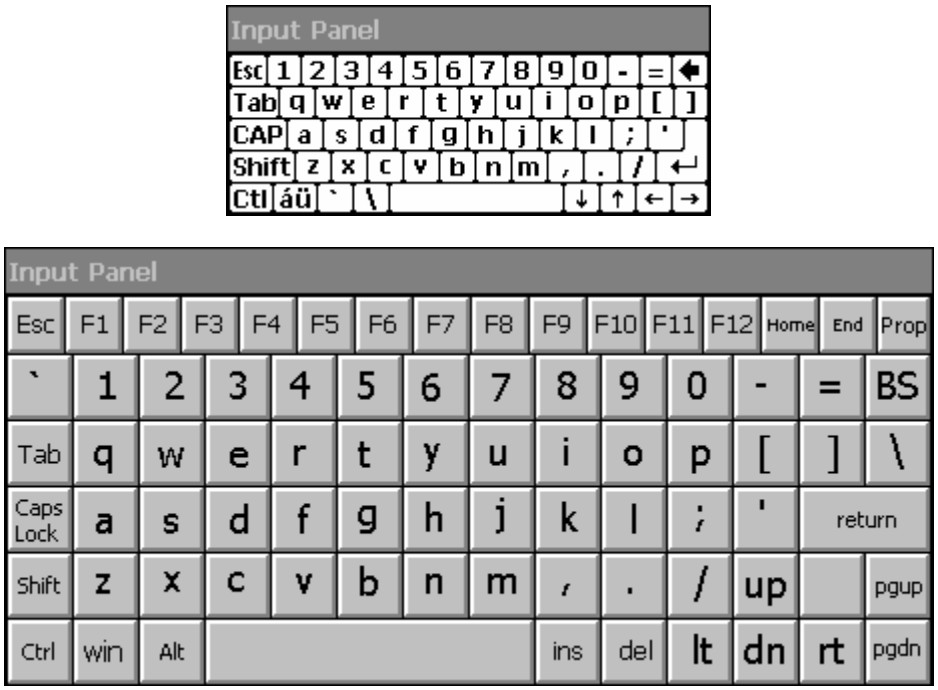
Input Panel
Esc 1 2 3 4 5 6 7 8 9 0 - = ←
Tab q w e r t y u i o p [ ]
CAP a s d f g h j k l ; '
Shift z x c v b n m , . / ↵
Ctl áü ` \ ↓ ↑ ← →
Input Panel
Esc F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12 Home End Prop
` 1 2 3 4 5 6 7 8 9 0 - = BS
Tab q w e r t y u i o p [ ] \
Caps Lock a s d f g h j k l ; ' return
Shift z x c v b n m , . / up pgup
Ctrl win Alt ins del lt dn rt pgdn

Figure 9 Small and Large Virtual Keyboards

Virtual keyboards display the actual character a keypress results in. For example, pressing the <Shift> key on the virtual keyboard toggles the characters displayed on the keys between upper and lower case. The <áü> key toggles the keys between standard and international symbols. The <Shift> and <áü> keys can be used in combination for capitalized international characters.

Note: When the virtual keyboard is displayed, the physical keyboard is still active. Therefore it is possible to input data from both keyboards.

Enabling the Input Panel

The Input Panel is disabled by default. Please see the "VX3X Reference Guide" for details on enabling the Input Panel

Power Supply

Vehicle power input for the VX3X is 12V to 80V DC and is accepted without the need to perform any manual adjustments within the VX3X. See the section titled “Installation”, sub-section titled “Vehicle 12-80V DC Direct Connection”.

If 12V to 80V DC power is not available – for example, in an office environment – an optional external Input Power Supply can be used to convert AC wall power to an appropriate DC level. See the section titled “Installation”, sub-section titled “External Power Supply”.

Backup Battery

The internal Lithium backup (coin cell) battery provides power to maintain date and time when the VX3X is not powered from an external source.

Caution	Danger of explosion if battery is incorrectly replaced. Replace only with the same type or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer’s instructions.

Getting Help

All LXE manuals are now available on one CD and they can also be viewed / downloaded from the LXE ServicePass website on the ServicePass / Documentation page. Contact your LXE representative to obtain the LXE Manuals CD or logon information for the ServicePass web pages.

You can also get help from LXE by calling the telephone numbers listed on the LXE Manuals CD, in the file titled "Contacting LXE". This information is also available on the LXE website.

Explanations of terms and acronyms used in this guide are located in the file titled "Glossary" on the LXE Manuals CD.

Manuals and Accessories

Manuals

The following manuals are available on the LXE Manuals CD:

- VX3X Reference Guide
- Contacting LXE
- LXE Technical Glossary

Accessories

The table below lists the available VX3X accessories.

- Where two parts numbers are listed for a given part, the part number ending in "-R" is the RoHS compliant version.
- When only one part number is listed, the part is RoHS compliant unless otherwise noted.

VX3X Brackets	
Bracket, RAM Squeeze Mount, VX3X	VX3XA001BRKTRAMSQZ
Data Cables	
Cable, PC, D9 to D9	9000A054CBL6D9D9
Cable, USB D9F to USB Client Type A	MX3A069CBL09USBCLNT MX3A069CBL09USBCLNT-R
Cable, Null Modem, Printer/PC D9 to D25	9000A053CBL6D9D25
Replacement Power Cables	
Cable, Input Power, 12 FT, VX3X	VX3XA051CBLPWR12FT
Power Supplies	
Power Supply, External, AC, W/US Power Cord VX3X	1300A304PSACUS
Power Supply, External, AC, No Power Cord VX3X	1300A303PSACWW
Adapter Cable for AC Power Supply to VX3X	9000A081CBLAC2VX3X

Miscellaneous	
Stylus, with Tethers and Sleeves, 5 Pack	9000A507STYLUS
Protective Film, Touchscreen, 10 Pack, VX3X	MX3XA503PROTFILM
Cover Plate, RS-232 Port	MX3RA351RS232CVR
Scanners	
Scanner, Powerscan, SR, 8’ Cbl, WW	8300A326SCNRPWRSR8DA9F 8300A326SCNRPWRSR8DA9F-R
Scanner, Powerscan, SR, 12’ Cbl, US	8300A327SCNRPWRSR12DA9F (above part is ***not*** RoHS compliant)
Scanner, Powerscan, SR, Low Temp, 8’ Cbl	8300A332SCNRS8D9FLT (above part is ***not*** RoHS compliant)
Scanner, Powerscan, SR, Low Temp, 12’ Cbl	8300A333SCNRS12D9FLT (above part is ***not*** RoHS compliant)
Scanner, Powerscan, LR, 8’ Cbl, WW	8310A326SCNRPWRLR8DA9F 8310A326SCNRPWRLR8DA9F-R
Scanner, Powerscan, LR, 12’ Cbl, US	8310A327SCNRPWRLR12DA9F 8310A327SCNRPWRLR12DA9F-R
Scanner, Powerscan, LR, Low Temp, 8’ Cbl	8310A332SCNRL8D9FLT (above part is ***not*** RoHS compliant)
Scanner, Powerscan, LR, Low Temp, 12’ Cbl	8310A333SCNRL12D9FLT (above part is ***not*** RoHS compliant)
Scanner, Powerscan, XLR, 8’ Cbl, WW	8320A326SCNRPWRXLR8DA9F 8320A326SCNRPWRXLR8DA9F-R
Scanner, Powerscan, XLR, 12’ Cbl, US	8320A327SCNRPWRXLR12DA9F (above part is ***not*** RoHS compliant)
Scanner, Powerscan, XLR, Low Temp, 8’ Cbl	8320A332SCNRX8D9FLT (above part is ***not*** RoHS compliant)
Scanner, Powerscan, XLR, Low Temp, 12’ Cbl	8320A333SCNRX12D9FLT (above part is ***not*** RoHS compliant)
Scanner, LS3408 Fuzzy Logic SR, D9 Interface Cable, 8ft	8510A326SCNRFZYDA9F 8510A326SCNRFZYDA9F-R
Scanner, LS3408 Extended Range, D9 Interface Cable, 8ft	8520A326SCNRERDA9F 8520A326SCNRERDA9F-R

Voice Recognition Accessories	
Headset coiled adapter cable, with quick disconnect connector to a 2.5 mm audio jack. A headset (see below) is required	9000A076CBLHEADSET1
Headset, Single Band	HX1A501SINGHEADSET
Headset, Dual Band	HX1A502DUALHEADSET
Headset, Behind the Ear, Dual Ear	HX1A503BTHHEADSET
Foam, Replacement Block, Headset	HX1A504HSBLOCKFOAM
Yoke, Replacement for Dual Band Headset	HX1A505DUALYOKE
Yoke, Replacement for Single Band Headset	HX1A506SINGLEYOKE
Replacement Microphone Foam, Wind Screen, 10 pack	HX1A508WINDSREEN10
Replacement Microphone Foam, Wind Screen, 50 pack	HX1A509WINDSREEN50
Replacement Headset Foam, Ear Cover, 10 pack	HX1A510FOAMEAR10
Replacement Headset Foam, Ear Cover, 50 pack	HX1A511FOAMEAR

Installation

Install Mounting Brackets

> ***Caution:***
> *This device is intended to transmit RF energy. For protection against RF exposure to humans and in accordance with FCC rules and Industry Canada rules, this transmitter should be installed such that a minimum separation distance of at least 20 cm (7.8 in.) is maintained between the antenna and the general population. This device is not to be co-located with other transmitters.*

Equipment Needed: Phillips No. 1 screwdriver and a Torque wrench capable of measuring to 50 inch pounds (5.64±.56 N/m).

Note: Torquing tool is not supplied by LXE. Tools needed to attach the RAM Clamp Mount to the vehicle are not supplied by LXE.

The VX3X is designed to use a RAM mount system.

Before installation begins, verify you have the applicable vehicle mounting bracket assembly components necessary, as shown in the following figures.

RAM Mount System

Components

RAM Mounting Assembly

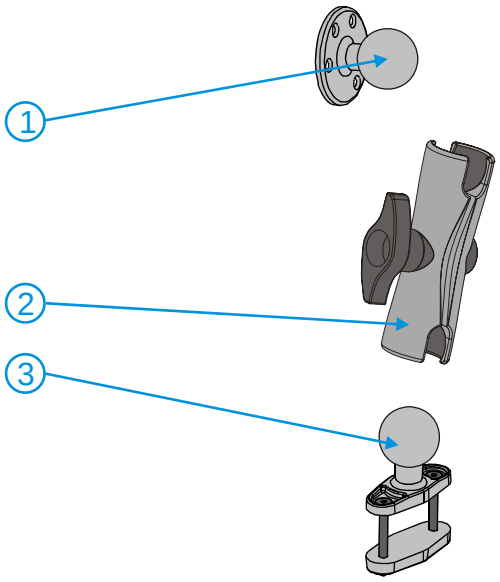

The RAM mounting assembly consists of the following parts:

1. VX3X RAM ball (included with VX3X)
2. RAM arm, size C
3. RAM clamp mount

   RAM Clamp Mount includes:
   Upper Clamp Piece with Ball
   Lower Clamp Piece
   Bolts (2 each)
   Nylon locking nuts (2 each)
4. Hardware (not shown):

   Lock Nuts, 10-32 (3 each)
   RAM wrench

Torque Measurements

You will need a torquing tool capable of torquing to 20 inch pounds (1.10 N/m).

Torque all screws and bolts according to the following table:

For these nuts…	Torque to
10-32 lock nuts	17 - 20 in/lb (0-95 - 1.10 N/m)

Procedure

Step 1 – Mount Vehicle RAM Clamp Mount

1. Determine the position for mounting the RAM clamp mount. The clamp mount can be used on a beam (such as on a fork lift truck) up to 2.5” (63.5 mm) wide and approximately 2” (50.8 mm) thick. The clamp may be attached to a thicker beam by substituting longer bolts (not included). Be sure to position the RAM clamp mount to allow access to the switches and ports on the VX3X.

2. Position the upper clamp piece with ball (A) on the beam. Place the bolts (B) through the holes in the upper clamp piece.

3. Position the lower clamp piece (C) below the beam. Align the bolts with the holes in the lower clamp piece.

4. Place the nylon locking nuts (D) on the bolts and tighten the bolts.

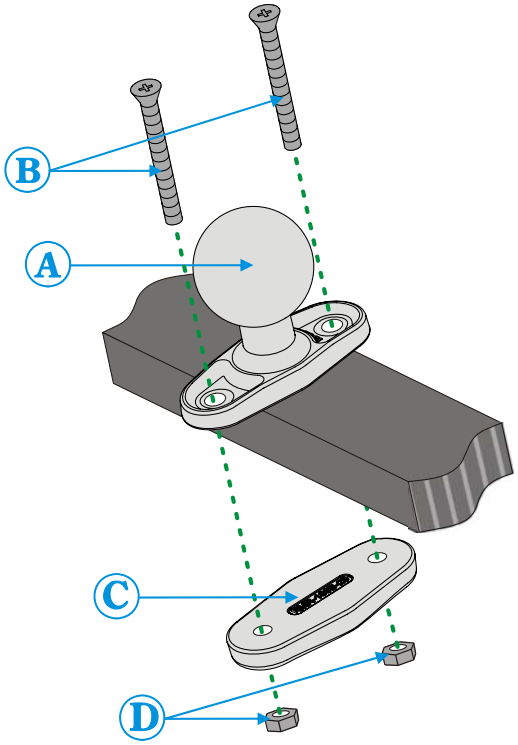

Figure 10 RAM Clamp Mount Components

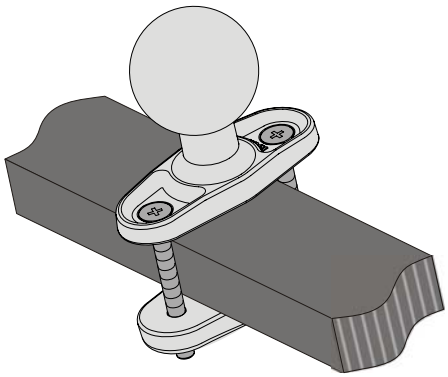

Figure 11 Assembled RAM Clamp Mount

Mounting Dimensions

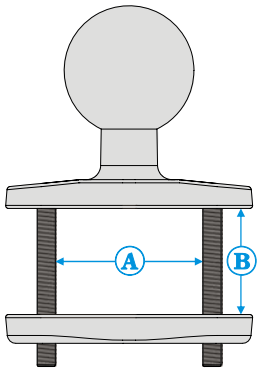

A 2.56” (65.02 mm)

B 1.84” (46.74 mm)
Varies depending on bolt length

Figure 12 RAM Clamp Mount - Mounting Dimensions (Not To Scale)

Step 2 – Attach RAM Mount Ball to the VX3X

1. Turn the VX3X off before attaching the RAM mount ball.

2. Place the VX3X face down on a stable surface.

3. Position the RAM ball bracket on the rear of the VX3X, aligning the studs on the back of the VX3X with the holes on the RAM ball mount bracket. Attach with three 10-32 lock nuts.

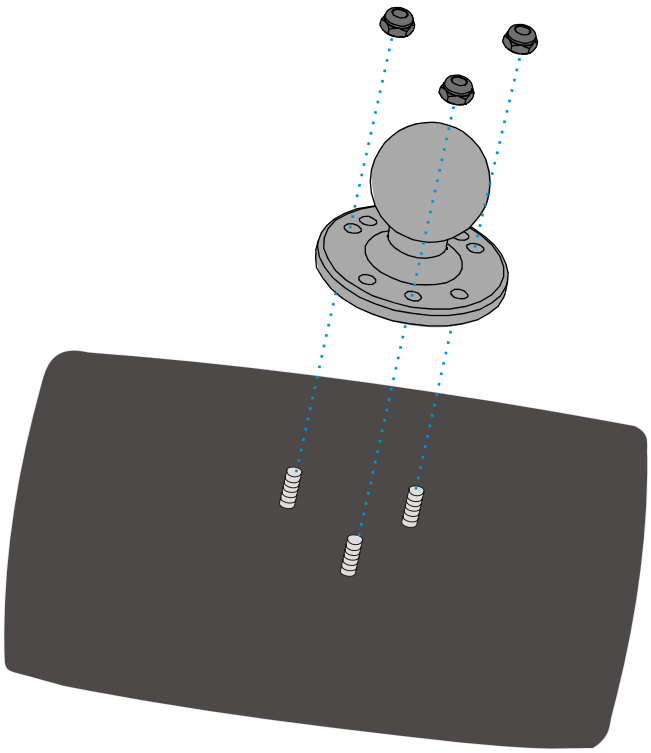

Figure 13 Attach RAM Mount to VX3X

Step 3 – Attach VX3X Assembly to RAM Mount

1. Slip the RAM arm over the ball on the vehicle RAM clamp mount. Insert the ball of the RAM mount bracket into the RAM arm. Adjust the VX3X to the desired position and tighten the knob on the RAM arm using the supplied RAM wrench.

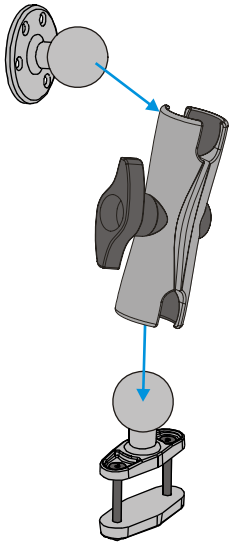

Figure 14 RAM Assembly

Completed Assembly

Figure 15 Completed RAM Mount Assembly

Install Stylus Tether and Sleeve (Optional)

Carefully remove the paper backing from the Stylus Clip sticky. Firmly press the sticky side of the clip onto the mobile device and hold in place for 15 seconds. Thread the tether through the end of the stylus and tie the ends firmly to the Stylus Clip so that the ends don't interfere with placing the stylus in the Stylus Clip. Place the stylus in the Stylus Clip when not in use.

An extra or replacement stylus can be ordered from LXE. See the section titled "Accessories" for the stylus part number.

Install/Remove Touchscreen Protective Film Optional)

First, clean the display of fingerprints, lint particles, dust and smudges.

Remove the protective film from its container. Remove any protective backing from the film sheet by lifting the backing from a corner of the film. Discard the backing.

Apply the film to the screen starting at one side and smoothing it across the display. If air bubbles appear, raise the film slightly and continue smoothing the film across the display until it covers the glass surface of the display.

If dust, lint or smudges are trapped between the protective film and the glass display, remove the protective film, clean the display and apply the protective film again.

Connect Serial Barcode Scanner

Refer to the documentation received with the barcode scanner for complete instructions. Read all warnings and caution labels.

Before using the scanner, read section titled “Operation”, sub- section titled “Laser Barcode Scanner Warnings”.

Pin 9 of COM3 is configured to provide +5V. To change Pin 9 of the port, please refer to the “VX3X Reference Guide”.

Caution – Do Not Use the USB-C Labeled Port for Tethered Scanners.

The scanner cable is attached to the connector labeled “RS-232”. The scanner receives power from the VX3X.

The cable requires a nine-pin D-shell female connector for the VX3X.

Note: Use of a shielded cable is required to maintain FCC and CISPR22 emissions compliance.

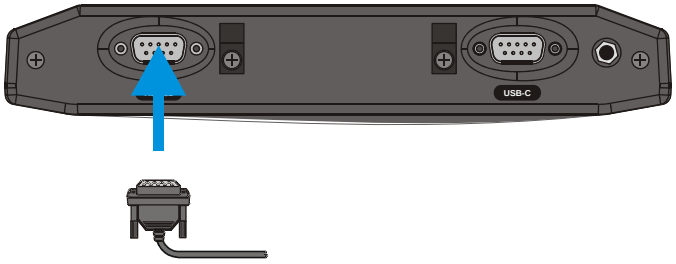

Figure 16 Connect Serial Scanner Cable

1. Power off the VX3X before connecting the scanner cable to the VX3X.
2. Seat the connector firmly over the pins and turn the thumbscrews in a clockwise direction. Do not overtighten.
3. Use a strain relief clamp to secure the cable.
4. Press the power button to power up the VX3X.

When you have finished using the scanner, remove it from the VX3X and store the scanner in a closed container or bag.

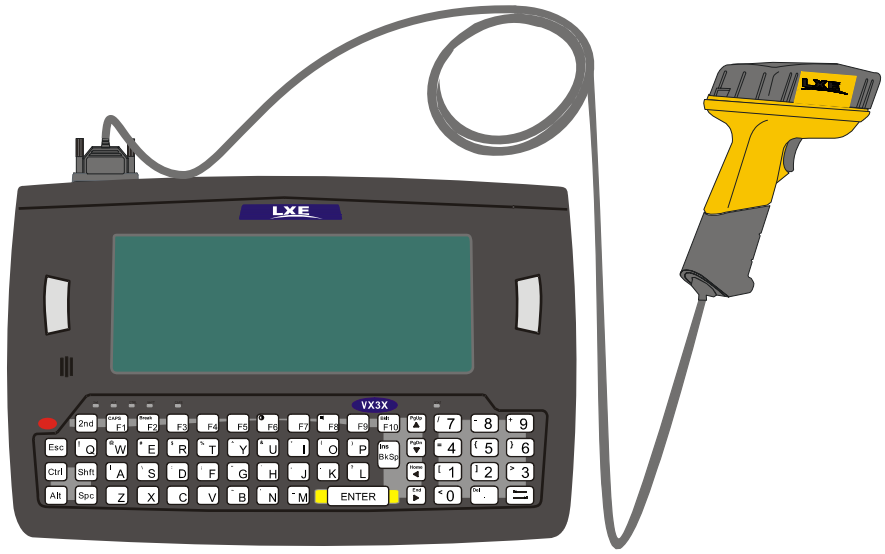

Figure 17 VX3X with Generic Barcode Scanner Attached

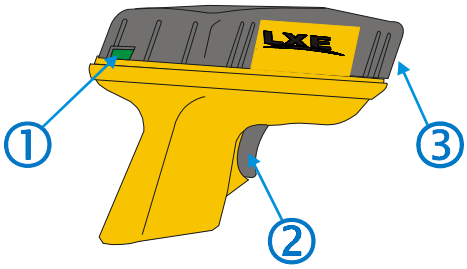

1. Good Scan LED (or equivalent)
2. Trigger
3. Laser Aperture at Front

Figure 18 Generic Barcode Scanner

Refer to the documentation received with the barcode scanner for complete instructions.

Connect Serial Printer or PC

Refer to the documentation received with the printer or PC for complete instructions.

Pin 9 of COM3 (labeled “RS-232”) is configured to provide +5V. To change Pin 9 of the port, please refer to the “VX3X Reference Guide”.

Caution – Do Not Use the USB-C Labeled Port for PC serial cables or printers.

The printer or PC cable requires a nine-pin D-shell female connector for the VX3X.

The printer or PC cable is attached to the connector labeled “RS-232”.

Note: Use of a shielded cable is required to maintain FCC and CISPR22 emissions compliance.

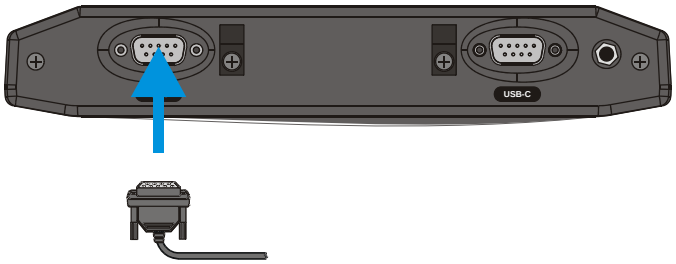

Figure 19 Connect Serial Cable to COM3

1. Power off the VX3X before connecting the cable to the VX3X.
2. Seat the connector firmly over the pins and turn the thumbscrews in a clockwise direction. Do not overtighten.
3. Use a strain relief clamp to secure the cable.
4. Press the power button to power up the VX3X.

USB-C Port

Caution – Do Not Use the USB-C Labeled Port for scanners, PC serial cables or printers.

The USB-C connector accepts an adapter cable which provides a USB client port. cable requires a nine-pin D-shell female connector for the VX3X.

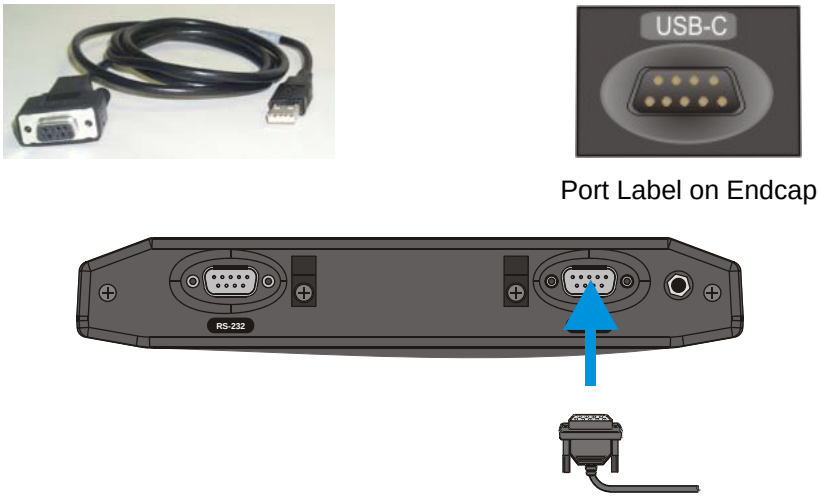

Figure 20 Connect USB-C Cable

1. Power off the VX3X before connecting the cable to the VX3X.
2. Seat the connector firmly over the pins and turn the thumbscrews in a clockwise direction. Do not overtighten.
3. Use a strain relief clamp to secure the cable.
4. Press the power button to power up the VX3X.
5. Attach the USB end of the cable to the PC.

Connect External Headset

The VX3X provides an external headset connection via an audio jack connector labeled “Audio”. The audio jack accepts a headset with a 2.5mm plug, such as a mono headset with microphone or a stereo headset. Please refer to the VX3X Reference Guide for information on configuring the audio port for a mono headset with microphone or a stereo headset.

An adapter cable (LXE Part No. 9000A076CBLHEADSET1) can be attached to the audio port. The adapter cable has a 2.5mm plug on one end to attach to the VX3X and a quick disconnect connector on the other end to connect to a variety of LXE voice recognition headsets.

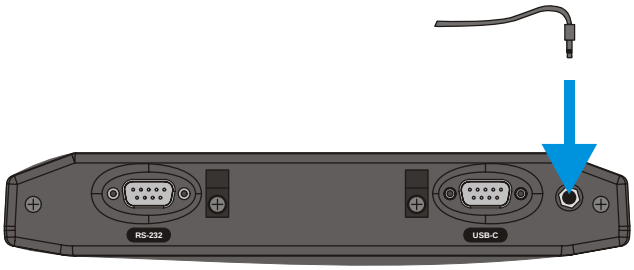

Figure 21 Connect External Headset

LXE Headsets

A coiled headset adapter cable is used to connect the VX3X to an LXE headset.

1. Insert the 2.5mm end of the adapter cable into the audio jack.

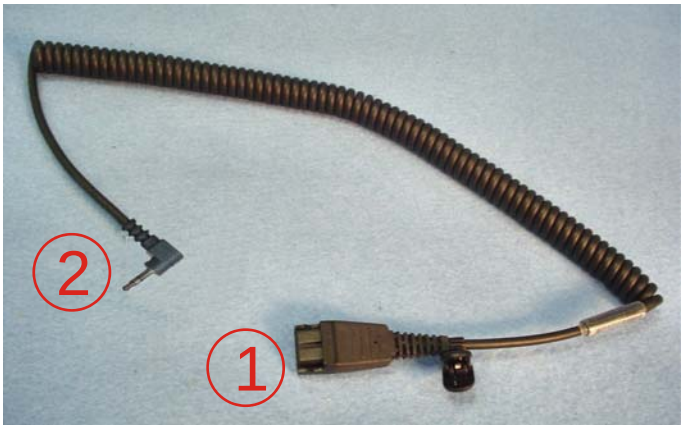

1 Quick Disconnect Connector

2 2.5mm Connector

Figure 22 Headset Adapter Cable Components

2. Use a strain relief clamp to secure the cable.

3. Connect the quick connect end of the adapter cable to the LXE headset. Align the pins and push the connectors together until they click and are locked in place.

Figure 23 Headset Quick Disconnect Connector

4. If the adapter cable is removed from the VX3X, replace the plug to ensure the VX3X is environmentally sealed.

Other Headsets

The audio jack accepts a headset with a 2.5mm plug, such as a mono headset with microphone or a stereo headset.

1. Insert the speaker or headphone plug into the audio connector; making sure the plug is firmly seated in the audio jack.

2. Replace the plug when the speaker or headset is removed from the audio jack.

3. Use a strain relief clamp to secure the cable.

Connect Power Cable

1. Connect the power cable to vehicle power (See the following section titled “Vehicle 12-80VDC Direct Connection”.)

   - or -

   to an AC adapter. (See the following section titled “External Power Supply”.).

2. The plug and receptacle are keyed and care must be used when connecting the cables. Tighten the nut of the plug clockwise until tight.

   Secure the cable with the strain relief cable clamps.

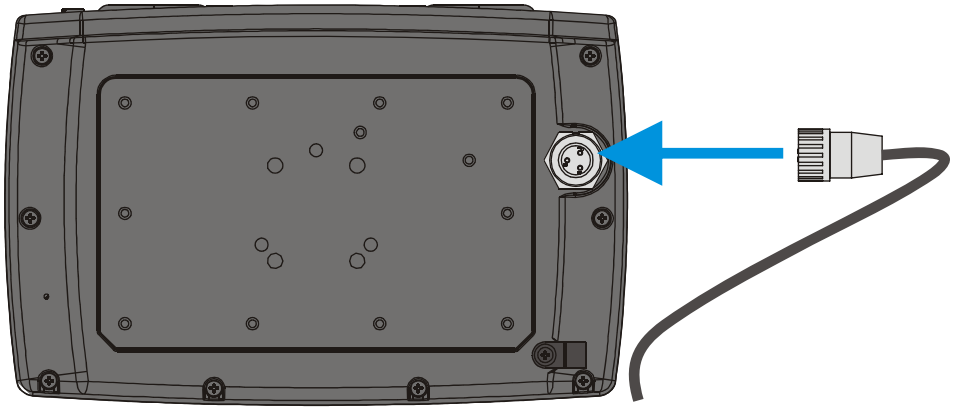

Figure 24 Connect Power Cable to VX3X

3. Turn the VX3X on.

External Power Supply, Optional

The LXE-approved AC Power Supply and Adapter Cable are only intended for use in a 25ºC (77ºF) maximum ambient temperature environment.

1. AC Input Cable (US only)
2. DC Output Cable

AC Power Supply

3. To DC Output Cable (see above)
4. To VX3X

Adapter Cable, AC Power Supply to VX3X

Figure 25 Optional Power Configuration

In North America, this unit is intended for use with a UL Listed ITE power supply with output rated 12 – 80 VDC, maximum 15W. Outside North America, this unit is intended for use with an IEC certified ITE power supply with output rated 12 – 80 VDC, maximum 15W.

The external power supply may be connected to either a 120V, 60Hz supply or, outside North America, to a 230V, 50Hz supply, using the appropriate detachable cordset. In all cases, connect to a properly grounded source of supply provided with maximum 15 Amp overcurrent protection (10 Amp for 230V circuits).

How To: Connect External Power Supply

1. Connect the detachable cordset provided by LXE (US only, all others must provide their own cable) to the external power supply (IEC 320 connector).
2. Plug cordset into appropriate, grounded, electrical supply receptacle (AC mains).
3. Connect the DC Output Cable end to the corresponding connector on the Adapter Cable.
3. Connect the watertight connector end of the Adapter Cable to the VX3X's Power Connector by aligning the connector pins to the power connector; push down on the watertight connector and twist it to fasten securely.
4. Turn the VX3X on.

Vehicle 12-80VDC Power Connection

Caution:	*For proper and safe installation, the input power cable must be connected to a fused circuit on the vehicle. This fused circuit requires a 2 Amp maximum time delay (slow blow) high interrupting rating fuse. If the supply connection is made directly to the battery, the fuse should be installed in the positive lead within 5 inches of the battery positive (+) terminal.*
Caution:	*For installation by trained service personnel only.*
Warning:	*Risk of ignition or explosion. Explosive gas mixture may be vented from battery. Work only in well ventilated area. Avoid creating arcs and sparks at battery terminals.*

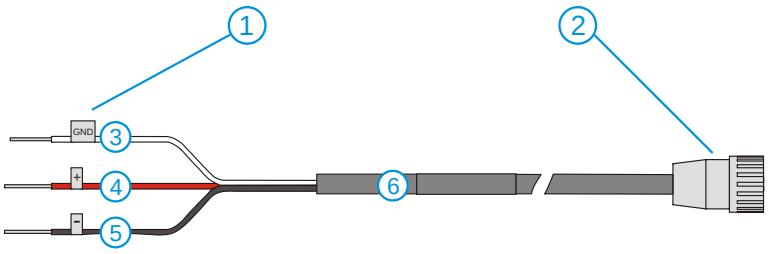

1. To Vehicle Battery
2. To VX3X
3. White (GND)
4. Red (DC+)
5. Black (DC-)
6. 12 – 80 VDC

Figure 26 Vehicle Power Connection Cable (Fuse Not Shown)

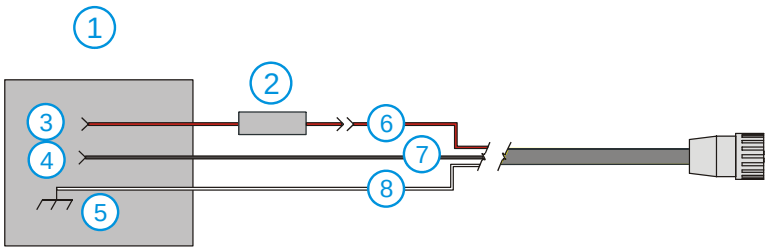

1. Vehicle Electrical System
2. 2 Amp Slow Blow Fuse
3. DC +
4. DC -
5. Vehicle Chassis
6. Red
7. Black
8. White

Figure 27 Connecting the Power Cable to the Vehicle

Note: Correct electrical polarity is required for safe and proper installation. See the following figure titled "Vehicle Connection Wiring Color Codes" for additional wire color-coding specifics.

How To: Connect Vehicle 12-80VDC Connection

1. The VX3X must be turned off and the power cable must be UNPLUGGED from the VX3X.

2. While observing the fuse requirements specified above, connect the power cable as close as possible to the actual battery terminals of the vehicle. When available, always connect to unswitched terminals in vehicle fuse panel, after providing proper fusing.

   ATTENTION: ***For uninterrupted power, electrical supply connections should not be made at any point after the ignition switch of the vehicle.***

3. Route the power cable the shortest way possible. The cable is rated for a maximum temperature of 75°C (167°F). When routing this cable it should be protected from physical damage and from surfaces that might exceed this temperature.

   Do not expose the cable to chemicals or oil that may cause the wiring insulation to deteriorate.

   Note: If the vehicle is equipped with a panel containing Silicon Controller Rectifiers (SCR's), avoid routing the power cable in close proximity to these devices.

   Always route the cable so that it does not interfere with safe operation and maintenance of the vehicle.

   Use proper electrical and mechanical fastening means for terminating the cable. Properly sized "crimp" type electrical terminals are an accepted method of termination. Please select electrical connectors sized for use with 22AWG (1mm^2) conductors.

   Wiring color codes for LXE supplied DC input power cabling:

Vehicle Supply		Wire Color
+12 - 80VDC	(DC +)	Red
Return	(DC -)	Black
Vehicle Chassis	GND	White

Figure 28 Vehicle Connection Wiring Color Codes

4. Provide mechanical support for the cable by securing it to the vehicle structure at approximately one foot intervals, taking care not to over tighten and pinch conductors or penetrate outer cable jacket.

5. Connect the power cable to the VX3X.

Operation

Power Button

The power button is located above the ESC key on the keypad. After power is connected, the Power button must be pressed to turn the device on.

Figure 29 Location of the Power (PWR) Button

Quickly tapping the Power button places the device immediately in Suspend mode. Quickly tapping the Power button again, or touching the screen, immediately returns the device from Suspend.

Power Management

Because the VX3X is powered by the vehicle battery, power management options are limited.

The display backlight can be configured to turn off after a specified period of inactivity. Please see the "VX3X Reference Guide" for configuration details.

The VX3X can be placed in Suspend Mode. To enter suspend mode, tap the power button and release or select **Start** | **Suspend**. To exit suspend tap the screen, press any key or tap the power button.

Restart Sequence

Tap **Start | Run,** then type **warmboot** in the textbox and press **Enter.** If the touchscreen is not accepting taps or needs recalibration, press <Ctrl>+<Esc> to force the Start Menu to appear.

When the Windows desktop is displayed or an application begins, the power on (or reboot) sequence is complete. If any changes to the settings had been saved previously, they are restored on reboot.

Display and Touchscreen

The VX3X Display is a transmissive LCD display capable of supporting Half VGA graphics modes. Display size is half screen, 640 x 240 pixels. The display covering is designed to resist stains. The touch screen allows signature capture and touch input.

The touch screen is a Resistive Panel with a scratch resistant finish that can detect touches by a stylus, and translate them into computer commands. In effect, it simulates a computer mouse. Only Delrin or plastic styluses should be used.

Note: Always use the point of the stylus for tapping or making strokes on the display. Never use an actual pen, pencil or sharp object to write on the touch screen.

An extra or replacement stylus may be ordered from LXE. See the "Accessories" section for the stylus part number.

Set the Display Contrast

Adjusting screen contrast lightens or darkens the characters to make them visible at a comfortable level. The contrast is incremented or decremented one step each time the contrast key is pressed.

◐ To adjust screen contrast, locate the <F6> key at the top of the keypad. Adjust the display contrast by pressing the:

- 2nd key then the <F6> key
- Use the Up Arrow and Down Arrow keys to adjust contrast until the display lightens or darkens to your satisfaction.
- Press the Enter key to exit this mode.

The LED for the 2nd key blinks until the special editing mode (set contrast) is complete.

Set the Display Backlight Timer

The Display Backlight Timer can be configured, if desired. For more information, please refer to "Set the Display Backlight Timer" in the "VX3X Reference Guide".

Set the Display Brightness

The brightness on the color display is incremented or decremented one step each time the arrow key is pressed until either the maximum or minimum brightness is achieved (8 steps). The brightness setting is recalled at power up.

- 2nd key then the <F10> key
- Use the Up Arrow and Down Arrow keys to adjust brightness until the display lightens or darkens to your satisfaction.
- Press the Enter key to exit this mode.

The LED for the 2nd key blinks until the special editing mode (set display brightness) is complete.

Cleaning the Display

Keep fingers and rough or sharp objects away from the display. If the glass becomes soiled or smudged, clean only with a standard household cleaner such as Windex® without vinegar or use Isopropyl Alcohol. Do not use paper towels or harsh-chemical-based cleaning fluids since they may result in damage to the glass surface. Use a clean, damp, lint-free cloth. Do not scrub optical surfaces. If possible, clean only those areas which are soiled. Lint/particulates can be removed with clean, filtered canned air.

Disabling the Touchscreen

The touchscreen can be disabled, if desired. For more information, please refer to "Disabling the Touchscreen" in the "VX3X Reference Guide".

Calibrating the Touchscreen

Although the touch screen is installed and calibrated at the factory, users may make adjustments to it. To calibrate the touchscreen, select **Start | Settings** and double tap the Stylus icon.

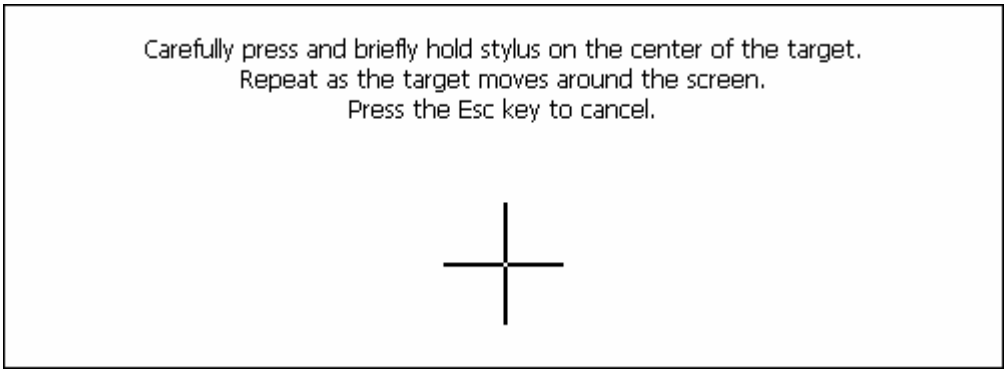
Carefully press and briefly hold stylus on the center of the target.
Repeat as the target moves around the screen.
Press the Esc key to cancel.

Figure 30 Touchscreen Calibration, Calibration Targets

The calibration utility displays a cross on the screen. Touch the center of the cross with the stylus and hold for a few seconds. Release and repeat with the next cross. After all locations have been touched, either press <Enter> or click the Calibration button.

Touchscreen Protective Film

LXE offers a replaceable touchscreen protective film to protect the touchscreen when the VX3X is used in an abrasive environment. Installation and removal instructions can be found earlier in this guide.

Adjust Speaker Volume

The speaker is located on the front of the device above the Power button. The audio volume can be adjusted to a comfortable level for the user. The volume is increased or decreased one step each time the volume key is pressed. The device has an internal speaker and a jack for an external headset. Operational "beeps" are emitted from the speaker.

Using the Keypad

Note: Volume & Sounds (in Control Panel) must be enabled before the following key sequences will adjust the volume.

◄ To adjust speaker volume, locate the <F8> key at the top of the keypad. Adjust the speaker volume by pressing the:

2nd key then the <F8> key to enter Volume change mode.

Use the Up Arrow and Down Arrow keys to adjust volume until the speaker volume is satisfactory.

Press the Enter key to exit this mode.

The LED for the 2nd key blinks until the special editing mode (set audio speaker volume) is complete.

Using the Touchscreen

Select **Start | Settings | Control Panel | Volume & Sounds | Volume** tab. Change the volume setting and tap OK to save the change. You can also select / deselect sounds for key clicks and screen taps and whether each is loud or soft.

As the volume scrollbar is moved between Loud and Soft, the computer will emit a tone each time the volume increases or decreases in decibel range.

Microsoft Windows CE .NET Event Sounds

The VX3X includes a customized sound scheme. The customized WAV files are preferable to the standard Microsoft Windows CE .NET sounds when using the internal speakers.

Laser Barcode Scanner Warnings

- Do not look into the laser's lens.
- Do not stare directly into the laser beam.
- Do not remove the laser caution labels from the scanner.
- Do not connect the laser barcode module to any other device.

Caution:	*Please read the caution labels.* *Avoid exposure. Laser light is emitted from the scanner's aperture.* *Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.* *The scanner uses laser light. The following labels are* ***representations*** *of caution and warning labels placed on laser scanners.*

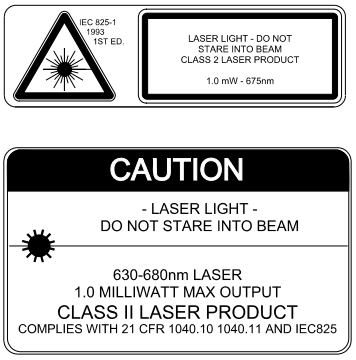

Figure 31 Caution Labels Class II Scanner

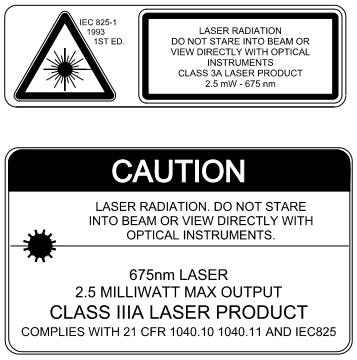

Figure 32 Caution Labels Class IIIA Scanner

Do not pour, spray, or spill any liquid on the scanner. The Barcode Scanner contains the circuitry, scanning motor and laser. Handle with appropriate care.

Enter Data

You can enter data into the VX3X through several different methods:

- The tethered scanner connected to the COM1 serial port provides barcode data entry
- The serial port and SUB port are used to input/output data
- The keyboard provides manual entry
- The touchscreen also provides manual entry

Keyboard Entry

Refer to Appendix A "Key Maps" for specific keypresses.

The keyboard is used to manually input data that is not collected otherwise. Almost any function that a full sized computer keyboard can provide is duplicated on the VX3X keyboard but it may take a few more keystrokes to accomplish a keyed task.

Almost every key has two or three different functions. The primary alpha or numeric character is printed on the key.

For example, when the <2nd> key is selected pressing the desired second-function key produces the <2nd> character i.e. <2nd> + F1 toggles the CAPS Lock function. The specific <2nd> character is printed above the corresponding key.

Please refer to Appendix A "Key Maps" for instruction on the specific keypresses to access all PC-compatible keyboard functions.

Touchscreen Entry

Note: This section is directed to the VX3X user. The assumption is that the unit has been configured and the touch panel calibrated by the System Administrator prior to releasing the VX3X for use.

Note: Always use the point of the stylus for tapping or making strokes on the display. Never use an actual pen, pencil or sharp object to write on the touch screen.

The touchscreen input performs the same function as the mouse that is used to point to and click elements on a desk top computer. The stylus is used in the same manner as a mouse – single tap or double tap to select menu options, drag the stylus across text to select, hold the stylus down to activate slider bars, etcetera. Holding the stylus down for ½ second performs the right mouse click function.

When using a stylus, hold the stylus as if it were a pen or pencil. Touch an element on the screen with the tip of the stylus then remove the stylus from the screen. The touch screen responds to an actuation force (touch) of up to 4 oz. of pressure.

The touch screen can be used in conjunction with the keyboard and an input/output device connected to one of the VX3X's serial ports.

- Touch the stylus to the field of the data entry form to receive the next data feed.
- The cursor begins to flash in the field.
- The unit is ready to accept data from either the keyboard or a device connected to a serial port.

Right Click

A right click can be simulated on the touch screen. To perform a right click, touch the touch screen with the stylus and hold it in the same location for a short time.

Scanner Entry

The following section is directed toward a generic tethered scanner connected to the COM1 serial port on the VX3X.

Aiming the Barcode Scanner

Aim the scanner ***away*** from you, direct it at the barcode and press the trigger to scan.

The Scan On LED (or equivalent) turns red to indicate the scanner is on.

Adjust the aim so that the thin, red laser beam covers the entire length of the barcode.

Some scanners use a laser aiming beam which then spreads into a wide beam when the scanner's Aiming Beam Timer expires. Place the aiming beam in the center of the barcode and hold the scanner steady until the beam spreads and the barcode is decoded. Beeps may be heard as the barcode is decoded. Refer to the barcode scanner user's guide for information on the Aiming Beam Timer and beep sequences, and the TE reference guide for host generated beep sequences.

The scan beam must cross every bar and space on the barcode.

Figure 33 Scan Beam

Distance from Label

Large barcodes can be scanned at the maximum distance. Hold the scanner closer to small barcodes (or with bars that are very close together).

Note: Do not position the scanner exactly perpendicular to the barcode being scanned. In this position, light can bounce back into the scanner's exit window, and possibly prevent a successful decode.

Successful Scan

When the scan is successful, the scanner's good scan indicator illuminates, the scan on indicator is off, and the currently running application may produce a distinctive audible tone.

Unsuccessful Scan

When the scan is unsuccessful, the scan on indicator remains illuminated and the currently running application may produce distinctive audible tones. Check the following:

- Is the scanner programmed for the barcode being read?
- Check the barcode for marks or physical damage e.g. ripped label, missing section, etc.
- Try scanning test symbols of the same code type at different distances and angles.

Appendix A Key Maps

The VX3X Keypad

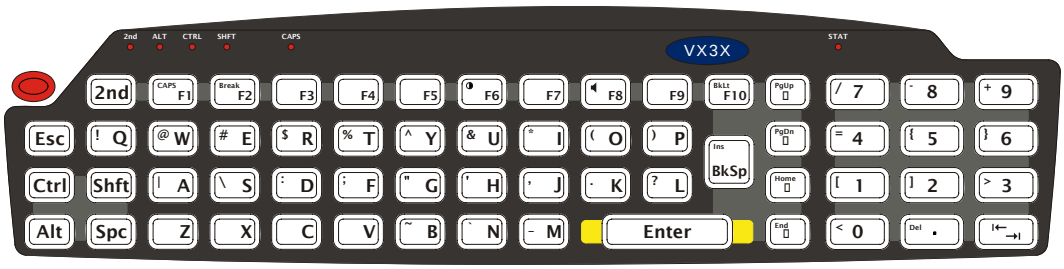

Figure 34 VX3X QWERTY Keyboard

The key map table that follows lists the commands used for the VX3X. Note that since the VX3X uses a Microsoft Windows CE .NET operating system, no DOS Terminal Emulation keypress sequences are provided.

Key Map 101-Key Equivalencies

Note: This key mapping is used on VX3X computers that are NOT running LXE's RFTerm.

When using a sequence of keys that includes the 2nd key, press the 2nd key first then the rest of the key sequence.

Note: When the computer boots, the default condition of Caps (or CapsLock) is Off. The Caps (or CapsLock) condition can be toggled with a 2nd+F1 key sequence. The CAPS LED is illuminated when CapsLock is On.

To get this key	Press These Keys and Then					Press this key
	2nd	Shift	Ctrl	Alt	CapsLock	
Contrast	x					F6
Volume	x					F8
Backlight	x					F10
2nd						2nd
Shift						Shft
Alt						Alt
Ctrl						Ctrl
Esc						Esc
Space						Spc
Enter						Enter

To get this key	Press These Keys and Then					Press this key
	2nd	Shift	Ctrl	Alt	CapsLock	
Scan [1]						Scan
CapsLock (Toggle)	x					F1
Back Space						BkSp
Tab						Tab
BackTab	x					Tab
Break	x					F2
Pause	x	x				F3
Up Arrow						Up Arrow
Down Arrow						Down Arrow
Right Arrow						Right Arrow
Left Arrow						Left Arrow
Insert	x					BkSp
Delete	x					DOT
Home	x					Left Arrow
End	x					Right Arrow
Page Up	x					Up Arrow
Page Down	x					Down Arrow
ScrollLock	x	x				F4
F1						F1
F2						F2
F3						F3
F4						F4
F5						F5
F6						F6
F7						F7
F8						F8
F9						F9
F10						F10
F11	x	x				F1
F12	x	x				F2
a					Off	A
b					Off	B
c					Off	C

[1] Left Scan key default value is Scan, however this key has no affect on an external scanner attached to the VX3X. Right Scan key default value is Enter.

To get this key	Press These Keys and Then					Press this key
	2nd	Shift	Ctrl	Alt	CapsLock	
d					Off	D
e					Off	E
f					Off	F
g					Off	G
h					Off	H
i					Off	I
j					Off	J
k					Off	K
l					Off	L
m					Off	M
n					Off	N
o					Off	O
p					Off	P
q					Off	Q
r					Off	R
s					Off	S
t					Off	T
u					Off	U
v					Off	V
w					Off	W
x					Off	X
y					Off	Y
z					Off	Z
A		x				A
B		x				B
C		x				C
D		x				D
E		x				E
F		x				F
G		x				G
H		x				H
I		x				I
J		x				J
K		x				K
L		x				L

To get this key	Press These Keys and Then					Press this key
	2nd	Shift	Ctrl	Alt	CapsLock	
M		x				M
N		x				N
O		x				O
P		x				P
Q		x				Q
R		x				R
S		x				S
T		x				T
U		x				U
V		x				V
W		x				W
X		x				X
Y		x				Y
Z		x				Z
1						1
2						2
3						3
4						4
5						5
6						6
7						7
8						8
9						9
0						0
DOT						DOT
<	x					0
[	x					1
]	x					2
>	x					3
=	x					4
{	x					5
}	x					6
/	x					7
-	x					8
+	x					9

To get this key	Press These Keys and Then					Press this key
	2nd	Shift	Ctrl	Alt	CapsLock	
*	x					I
: (colon)	x					D
; (semicolon)	x					F
?	x					L
`	x					N
_ (underscore)	x					M
, (comma)	x					J
‘ (apostrophe)	x					H
~ (tilde)	x					B
\	x					S
|	x					A
“	x					G
!	x					Q
@	x					W
#	x					E
$	x					R
%	x					T
^	x					Y
&	x					U
(	x					O
)	x					P

IBM 3270 Keypad Overlay

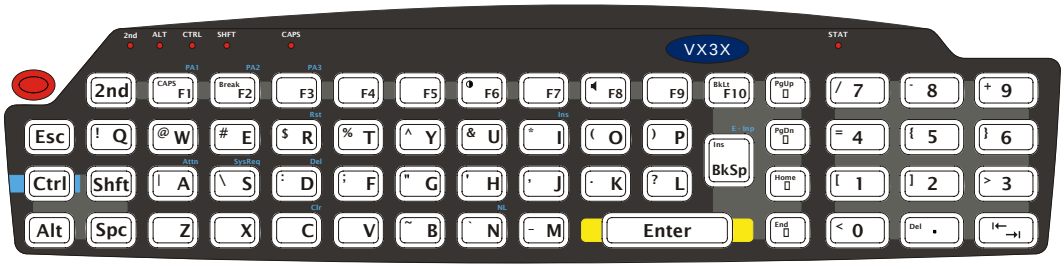

Figure 35 IBM 3270 Specific Keypad

The 60-key keypad is available with an IBM 3270 overlay designed to allow the user to enter terminal emulator commands when running LXE's RFTerm™ program. When running this program please refer to the following reference guide for equivalent keys and keypress sequences:

- RFTerm™ Reference Guide

IBM 5250 Keypad Overlay

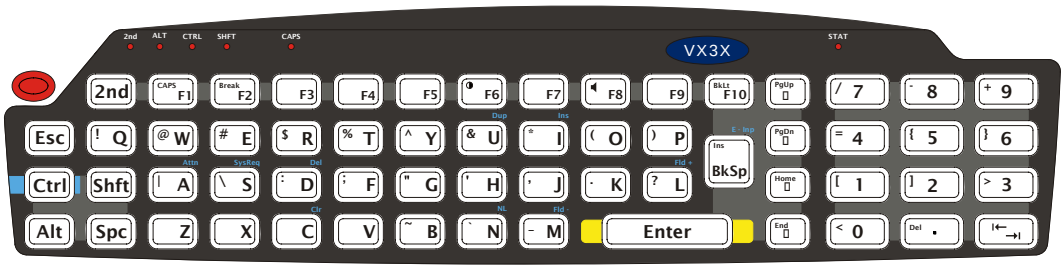

Figure 36 IBM 5250 Specific Keypad

The 60-key keypad is available with an IBM 5250 overlay designed to allow the user to enter terminal emulator commands when running LXE's RFTerm™ program. When running this program please refer to the following reference guide for equivalent keys and keypress sequences:

- RFTerm™ Reference Guide

Appendix B Regulatory Notices and Safety Information

FCC Information:

This device complies with FCC Rules, part 15. Operation is subject to the following conditions:

1. This device may not cause harmful interference
   and
2. This device must accept any interference that may be received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
Warning: Changes or modifications to this device not expressly approved by LXE, Inc., could void the user's authority to operate this equipment.

EMC Directive Requirements:

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Industry Canada:

This Class A digital apparatus meets all requirements of the Canadian Interference Causing Equipment Regulations. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Cet appareil numérique de la classe A respecte toutes les exigences du Règlement sur le matériel brouiller du Canada. Le present appareil numérique n'emet pas de bruits radioélectriques dépassant les limites applicables aux appareils numeriques de le Classe A préscrites dans le Reglement sur le brouillage radioélectrique édits par le ministere des Communications du Canada.

Notice:

The long term characteristics or the possible physiological effects of radio frequency electromagnetic fields have not been investigated by UL.

RF Safety Notice:

Caution:

This device is intended to transmit RF energy. For protection against RF exposure to humans and in accordance with FCC rules and Industry Canada rules, this transmitter should be installed such that a minimum separation distance of at least 20 cm (7.8 in.) is maintained between the antenna and the general population. This device is not to be co-located with other transmitters.

R&TTE Directive Requirements (Applies only to Equipment operated within the EU/EFTA)

Information to User

A label on the exterior of the device should resemble one of the labels shown below (the label contains the LXE part number of the installed radio card). The labels shown below and affixed to the device, identify where the device may be used and where its use is restricted. Use of a device is prohibited in countries not listed below or otherwise identified by the label. (May or may not include the 0560 Notified Body No.)

Permitted for use in: Austria, Belgium, Denmark, Finland, Germany, Greece, Hungary, Iceland, Italy, Ireland, Liechtenstein, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, and the United Kingdom

Permitted for use in France.

Approvals

Product	EMI / EMC Standards	Safety Standards
VX3X	FCC Part 15 Subpart B, Class A EN 55022:1998 Class A EN 55024:1998 Industry Canada Class A	UL 60950-1:2003 For indoor use only CSA C22.2 No. 60950-1:2003 EN 60950-1:2001 IEC 60950-1:2001

Transceiver	RF Standards	Notes
4830 (LXE Model No.) LXE 2.4GHz CF with Type II PCMCIA Adapter Card	FCC Part 15.247, Subpart C FCC Bulletin OET-65 EN 300 328 IC-RSS 210 IC-RSS 102	Unlicensed Operation Unlicensed Operation Requires License for Outdoor Use

Important: This symbol is placed on the product to remind users to dispose of Waste Electrical and Electronic Equipment (WEEE) appropriately, per Directive 2002-96-EC. In most areas, this product can be recycled, reclaimed and re-used when properly discarded. Do not discard labeled units with trash. For information about proper disposal, contact LXE through your local sales representative, or visit www.lxe.com.

LXE Transceiver LXE 4830 Declaration of Conformity

DECLARATION OF CONFORMITY

according to Directives:

1999/5/EC	**Radio Equipment and Telecommunications Terminal Equipment and the mutual recognition of their conformity**
93/68/EEC	**CE Marking Directive**

Type of Equipment:	Direct Sequence 2.4 GHz Wireless LAN Card
Brand Name or Trademark:	LXE
Type Designation:	LXE 4830
Manufacturer:	LXE Inc.
Address:	125 Technology Parkway Norcross, GA 30092-2993 USA
Year of Manufacturer:	2006

The following harmonized European Standards, technical specifications, or other normative documents have been applied:

EMC:

EN 301 489-1: 07-2000	Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements
EN 301-489-17 07-2000	Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Wideband data and HIPERLAN equipment

Radio:

EN 300 328-1 and -2: 2000-7	Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques

Safety:

EN 60950-1: 2001	Safety of information technology equipment, including electrical business equipment

We, LXE Inc., declare that the equipment specified above complies with all Essential Health and Safety Requirements of the above Directives and Standards, as amended.

Place: LXE Inc., Norcross GA USA

C. Binnom Jr.

RF Approvals Engineer

Date of issue: 23 October 2006

LXE Inc. 125 Technology Parkway Norcross, GA 30092-2993 USA

ph. 770/447-4224 fax 770/447-6928

Annex to DoC for LXE 4830

With regard to the use of external antennas

The LXE 4830 can be equipped with external antennas. The antennas listed have been evaluated with the LXE 4830 pursuant to EN 300 328, and therefore meet the definition of 'dedicated antenna' per ERC/REC 70-03 Appendix 1 Table 3; thus the requirement set forth in ERC/REC 70-03 , Annex 3 are met by the LXE model 4830 transceiver.

Dedicated Antennas for use with LXE 4830

LXE P/N	Antenna Gain	Radio Power Level	Antenna Description
153180-0001	2.2 dBi	15.8 dBm	Omni, for LXE VX-series computers
160952-0001	0 dBi	15.8 dBm	Omni, for LXE MX3-series computers
158399-0001	0 dBi	15.8 dBm	Omni, for LXE MX5-series computers
159900-0001	0 dBi	15.8 dBm	Omni, for LXE MX7-series computers
160019-0001	0 dBi	15.8 dBm	Omni, for LXE VX-series computers
160501-0001	0 dBi	15.8 dBm	Omni, for LXE HX1-series computers
161029-0001	0 dbi	15.8 dBm	Omni, for LXE RX2-series computers

C. Binnom Jr.
RF Approvals Engineer
23 October 2006

LXE Inc. 125 Technology Parkway Norcross, GA 30092-2993 USA
ph. 770/447-4224 fax 770/447-6928

Lithium Battery Safety Statement

Caution:
Lithium battery inside. Danger of explosion if battery is incorrectly replaced. Replace only with same or equivalent type recommended by battery manufacturer. (US)

Attention:
Contient une pile de lithium. Risque d'explosion dans le cas où la pile ne serait pas correctement remplacée. Remplacer uniquement avec une pile semblable ou equivalente au type de pile recommandé par le fabricant. (FR)

Forsigtig:
Indeholder lithiumbattterier. Risiko for eksplosion, hvis batteriet udskiftes forkert. Må kun udskiftes med samme eller tilsvarende type, som anbefalet af fabikanten. (DK)

Varoitus:
Tämä tuote käyttää laservaloa. Skannerissa on jokin seuraavista tarroista. Lue Huomio-kohta. (FI)

Vorsicht:
Enthält Lithium-Batterie. Bei unsachgemäßem Ersatz besteht Explosionsgefahr. Nur durch gleichen oder vom Hersteller empfohlenen Typ ersetzen. (DE)

Attenzione:
Batteria al litio. Pericolo di esplosione qualora la batteria venga sostituita in maniera scorretta. Sostituire solo con lo stesso tipo o equivalente consigliato per il fabbricante. (IT)

Atenção:
Contém pilha de lítio. Há perigo de explosão no caso de uma substituição incorreta. Substitua somente pelo mesmo tipo, ou equivalente, recomendado pelo fabricante. (PT)

Varning:
Innehåller litiumbatteri. Fara för explosion om batteriet är felaktigt placerat eller av fel typ. Använd endast samma eller motsvarande typ batterier rekommenderade av tillverkaren. (SE)

Advarsel:
Innmontert Lithium batteri. Eksplosjonsfare ved feil montering av batteri. Benytt kun batteri anbefalt av produsent. (NO)

Cuidado:
Pila de litio adentro. Peligro de explosión si la pila se reemplaza incorrectamente. Reemplace solamente con el mismo tipo o equivalente recomendado por el fabricante. (ES)

Oppassen:
Bevat Lithium-batterij. Incorrrecte plaatsing van batterij kan leiden tot explosiegevaar. Alleen vervangen door hetzelfde of door fabrikant aanbevolen gelijkwaardig type. (NL)

Lithium Battery Safety Statement

Προσοχή: Υπάρχει μπαταρία από λίθιο εσωτερικά. Υπάρχει κίνδυνος έκρηξης εάν η μπαταρία αντικατασταθεί με λανθασμένο τρόπο. Αντικαταστήστε μόνο με τον ίδιο ή ισοδύναμο τύπο που συνιστάται από τον κατασκευαστή. (GR)	**주의:** 리튬 배터리 내부. 배터리가 잘못 설치되었을 경우 폭발의 위험이 있습니다. 동일한 배터리, 또는 배터리 제조업체가 권장하는 배터리로 교체하십시오. (KR)
注意: リチウム電池が入っています。間違った種類の電池を使用すると、破裂する恐れがあります。同じ電池、または電池製造元が推奨する同等の電池を使用してください。 (JP)	**小心:** 内装锂电池。如电池更换不当，则有发生爆炸的危险。只能用电池制造商推荐的相同或同等电池进行更换。 (CN)
Dikkat: İçinde lityum bataryası bulunur. Bataryanın yanlış değiştirilmesi patlama tehlikesi yaratır. Aynısıyla veya üreticinin önerdiği eşdeğer tiple değiştirin. (TR)	

Legend:

Chinese	CN	Italian	IT
Danish	DK	Japanese	JP
Dutch	NL	Korean	KR
English	US	Norwegian	NO
Finnish	FI	Portuguese	PT
French	FR	Spanish	ES
German	DE	Swedish	SE
Greek	GR	Turkish	TR

A/C Power Supply Safety Statement – VX3X
Output Rated 12 – 80 VDC, Minimum 15W.

The LXE-approved AC Power Adapter is only intended for use in a 25ºC (77ºF) maximum ambient temperature environment.

Optional A/C Power Supply:
Outside North America, this unit is intended for use with an IEC certified ITE power supply with output rated as stated at the top of this page. (US)

Alimentation c.a. optionnelle:
Hors de l'Amérique du Nord, cette unité est conçue pour être utilisée avec une alimentation ITE certifiée CEI de sortie nominale indiquée au haut de cette page. (FR)

Valgfrit vekselstrømforsygning
Udenfor Nord Amerika er denne enhed udstattet med en IEC (international elektronisk Kommission) udfærdiget med en ITE strømforsygning med strømudgang som fastslået på denne sides begyndelse. (DK)

Vaihtoehtoinen vaihtovirran syöttölaite:
Pohjois-Amerikan ulkopuolella tämä laite on tarkoitettu käytettäväksi sellaisen IEC:n sertifioiman ITE-tehonsyöttölaitteen kanssa, jonka antoteho on tämän sivun yläosassa esitetyn mukainen. (FI)

Optionales Netzteil (Wechselstrom)
Außerhalb Nordamerikas sollte diese Einheit über ein der IEC-Norm entsprechendes ITE-Netzteil gespeist werden, und zwar mit einer wie oben auf dieser Seite genannten Ausspeisung. (DE)

Προαιρετική Τροφοδοσία Συνεχούς Ρεύματος
Εκτός Β. Αμερικής, η μονάδα αυτή προορίζεται για χρήση με ένα τροφοδοτικό ITE πιστοποιημένο κατά IEC με ονομαστική ισχύ όπως δηλώνεται στην αρχή της σελίδας. (GR)

Alimentazione opzionale a corrente alternata:
Al di fuori dei paesi dell'America del nord, l'unità deve essere impiegata con un dispositivo d'alimentazione per attrezzature informatiche approvato dalla IEC la cui potenza nominale sia pari a quella indicata all'inizio della pagina. (IT)

Vekselstrømforsyning (ekstrautstyr):
Utenfor Nord-Amerika skal dette produktet brukes med en IEC-sertifisert ITE-strømforsyning med klassifisert effekt som angitt øverst på denne siden. (NO)

Fornecimento opcional de CA:
Fora dos EUA, esta unidade destina-se a ser usada com dispositivos de fornecimento de corrente ITE com certificação IEC, com a capacidade indicada no topo desta página. (PT)

Suministro optativo de corriente alterna
Fuera de América del Norte, esta unidad se debe utilizar con un alimentador ITE homologado por la IEC (comisión electrotécnica internacional) con una salida que tenga la calificación que figura en la parte superior de esta página. (ES)

Valfri A/C Strömförsörjning
Utanför Nordamerika är det meningen att denna enheten används med en IEC-certifierad ITE-strömförsörjare med den uteffekt som anges längst uppe på den här sidan. (SE)

İsteğe Bağlı A/C Güç Kaynağı:
Kuzey Amerika dışında, bu ünite, çıkış sınıflandırması bu sayfanın başında belirtilen IEC sertifikalı bir ITE güç kaynağı ile birlikte kullanılmak üzere tasarlanmıştır. (TR)

Updated 10/01/2001

Legend: Danish – DK; English – US; Finnish – FI; French- - FR; German – DE; Greek – GR; Italian – IT; Norwegian – NO; Portuguese – PT; Spanish – ES; Swedish – SE; Turkish – TR.

Vehicle Power Supply Connection Safety Statement

Vehicle Power Supply Connection:
If the supply connection is made directly to the battery, a 2A slow-blow fuse should be installed in the positive lead within 5 inches (12.7 cm.) of the battery positive (+) terminal. (US)

Raccordement de l'alimentation du véhicule
Si l'alimentation est raccordée directement à la batterie, un fusible à action retardée de 2A doit être installé sur le câble positif à moins de 12,7 cm de la borne positive (+) de la batterie. (FR)

EL forsyning af køretøjet.
Er forsyningsforbindelsen direkte tilknyttet til batteriet og og tilsluttet til den positive part indenfor 12,7 cm (+ delen). vil der være en langsom tændelse af 2 ampere. (DK)

Kytkentä ajoneuvon virtalähteeseen
Jos virtaa otetaan suoraan akusta, 2 ampeerin hidas sulake on asennettava positiiviseen johtoon enintään 12 cm:n etäisyydelle akun positiivisesta (+) navasta. (FI)

Anschluss an Fahrzeugbatterie
Bei direktem Anschluss an die Fahrzeugbatterie sollte eine träge 2A-Sicherung in die positive Leitung zwischengeschaltet werden, und zwar nicht weiter als ca. 13 cm von der positiven (+) Batterieklemme entfernt. (DE)

Σύνδεση Τροφοδοτικού Ισχύος Οχήματος
Αν η σύνδεση του τροφοδοτικού γίνει κατευθείαν στη μπαταρία, μια ασφάλεια βραδείας τήξης των 2A θα πρέπει να τοποθετηθεί στο θετικό καλώδιο εντός 5 ιντσών (12,7 εκ.) του θετικού (+) ακροδέκτη της μπαταρίας. (GR)

Collegamento dell'alimentazione del veicolo
Se il collegamento dell'alimentazione viene stabilito direttamente con la batteria, è necessario installare un fusibile ad azione lenta da 2 A nel conduttore positivo a meno di 5 in. (12,7 cm) dal terminale positivo (+) della batteria. (IT)

Tilkople strømforsyningen til kjøretøyet
Hvis strømforsyningen koples direkte til batteriet, skal det installeres en 2 A treg sikring i den positive ledningen innen 12,7 cm fra plusspolen (+) på batteriet. (NO)

Ligação do fornecimento de corrente do veículo
Se a ligação de fornecimento de corrente for ligada directamente à bateria, deve instalar-se um fusível de 2A no terminal positivo, a 12,7 cm. do terminal positivo (+) da bateria. (PT)

Conexión de suministro eléctrico para el vehículo
Si el suministro eléctrico se proporciona directamente a la batería, se debe instalar un fusible de retardo de 2 A en el conductor positivo, como máximo a 12,7 cm (5 pulgadas) del terminal positivo (+). (ES)

Fordonets strömförsörjningskoppling
Om strömkopplingen görs direkt till batteriet, måste en 2A-säkring installeras i den positivt laddade ledningen inom 12.7 cm från batteriets pluspol (+). (SE)

Taşıt Güç Kaynağı Bağlantısı
Kaynak bağlantısı doğrudan aküye yapılırsa, pozitif bağlantı kablosu üzerinde akünün pozitif (+) kutbuna 12.7 cm mesafede 2A'lık yavaş atan bir sigorta monte edilmelidir. (TR)

Legend: Danish – DK; English – US; Finnish – FI; French- - FR; German – DE; Greek – GR; Italian – IT; Norwegian – NO; Portuguese – PT; Spanish – ES; Swedish – SE; Turkish – TR.

Updated 02/10/2004

Index

2

2nd key function 9

A

Aim Barcode Scanner 43
Alt key function 9
AppLock 7
  Hotkey 7
  Touchscreen 7
Audio Volume settings 40

B

Back Mounting Bracket
  and VX6 23
Backup Battery 14
Barcode Scanner 26
Barcode scanner data entry 42
Battery, Backup, Lithium 14
Beam, Long Range Scanner 43
Bottom Mounting Bracket 21
Bracket
  How To 21
  Tools Required 19

C

Caps mode function 10
Cleaning
  Display 39
Color Codes, Wiring 35
Connection
  COM1 26
  COM3 ....28, 29
  External Speakers 30
Control Panel, Windows CE .NET 6
Controls, Physical 37
CPU 1
Ctrl key function 9
Custom Key Maps 10

D

Data entry, How To 41
Display 6
  adjust contrast 38
  Cleaning 39
  Features 38
  Pixels 6, 38
Display Contrast 38
Document Conventions 2

E

Enter Data, How To 41
Enter key function 9
Environmental Specifications 2
External Speakers 30

F

Features 1
Flash Memory 1
Function
  2nd Key 9
  Alt Key 9
  Caps Mode 10
  Ctrl Key 9
  Enter Key 9
  Shft Key 9
  Spc Key 9

G

Getting Started 3
Good Scan LED 27

H

Headphone Jack 30
How To
  Aim the Scan Beam 43
  Connect 12-80VDC Vehicle Power 35
  Connect Barcode Scanner 26
  Connect External Speakers 30
  Connect Serial Printer 28, 29
  Install Vehicle Mounting Brackets 19
  Keyboard data entry 42

I

Input Cable, Max Temp rating 35
Install
External Speakers.....30, 31
Mounting Brackets, Vehicle 19
Optional Power Supply 33
Printer or PC 28, 29
Scanner.....26

K

Key Map 45
TN3270 keypads 50
Keyboard data entry 42
keyboard shortcuts.....12
Keymaps 45
Keypad Shortcuts.....10

L

Laser Aperture 27
Laser barcode scanner warnings.....41
LEDs
2nd function.....11
ALT function 11
CAPS function 11
CTRL function 11
on keypads,location.....11
SHFT function 11
STAT function 11

M

Manuals 15
Maximum overcurrent protection 33
Measurement,Torque.....20
Mode Key Functions 10

N

Nine-pin D-shell female connector
and the Scanner.....26
for printer or PC.....28, 29

O

Operating Temperature.....2
Overcurrent protection.....33

P

Pen Stylus 38, 42
Polarity 35
Power Button.....37
Power Management
Windows CE .NET 40
Printer 28, 29
Procedure
Mounting Brackets.....21
Protective Film 25

Q

Quick Start Instructions.....3

S

Scanner
Nine-pin D-shell female connector 26
Scanner data entry 42
Scanner Installation 26
Scanning distance 43
Serial Printer.....28, 29
Shielded Cable
and the PC or printer.....28, 29
Shielded Cable Requirement 26
Shift key function 9
Silicon Controller Rectifiers (SCR's) 35
Sizing of electrical connectors for use with 22AWG conductors 35
Space key function 9
Speaker Volume 40
using keypad 40
using touchscreen.....40
Specifications
Environmental.....2
Stylus 38, 42
Stylus Clip 25
Stylus Data Entry.....42
Successful Scan indicators 43
SVGA graphics modes 6

T

Terminal Emulator List 1
Thin Film Transistor (TFT) Display.....6
Tools Required
Phillips No. 1 Screwdriver.....19
Torque Wrench 20
Torque Wrench.....19
Touch Screen 38, 42
Touch Screen and Keypad Shortcuts.....10
Touchscreen
Data Entry 42
Finger or Stylus.....42
Trigger 27

U

Unsuccessful Scan indicators 43

V

Vehicle Mounting Bracket, Installation Procedure .19
Vehicle Power
  12V to 80V DC 14
  External Power Supply 33
View
  Display 38
Volume
  adjust audio volume 40
VX3X Reference Guide 1

W

Warning
  Laser light 41
Windows CE .NET
  Control Panel 6
  Help Screens 6
  Power Management 40
Windows CE .NET online Help 6
Wiring Color Codes.....35